

# ProLine

## TOOL & SUPPLY, LLC

### LK4054 TOPPER ATTACHMENT Assembly Guide



[www.prolinetoolsupply.com](http://www.prolinetoolsupply.com)

(989) 315-8946

# Table of Contents

TOPPER ATTACHMENT	3
SPECIFICATIONS	3
PARTS & HARDWARE	4
ASSEMBLY GUIDE	4
OPERATION	7




If you have any questions or comments, please call 1 (989) 315-8946.

**Proline Tool & Supply, LLC**  
**210 Pigeon Rd Bad Axe MI 48413 US**  
**(989) 315-8946**

# Topper Attachment


The LK4054 Topper Attachment installs on the LK4000 Lift King (Main Component) in a matter of seconds and allows one person to install or remove a pickup topper with little effort. It is a safe and fast way to increase productivity.

## Specifications

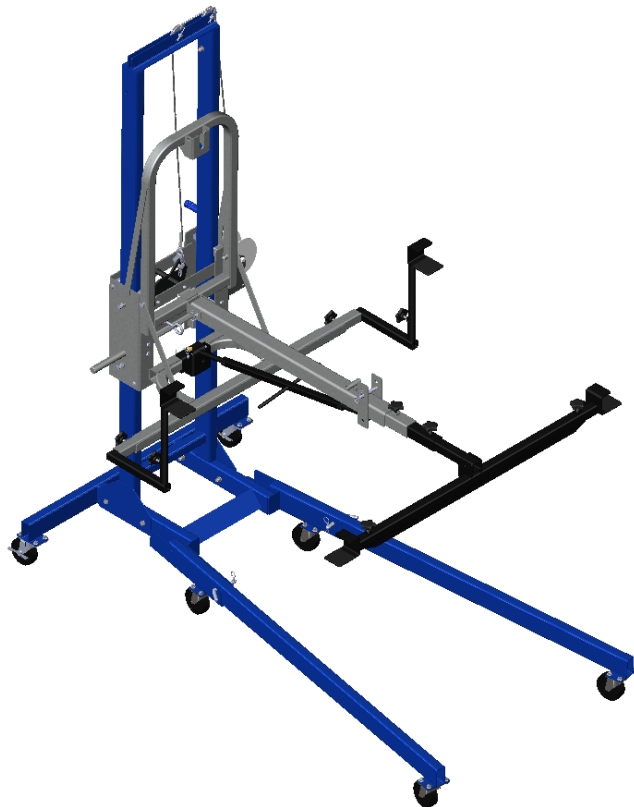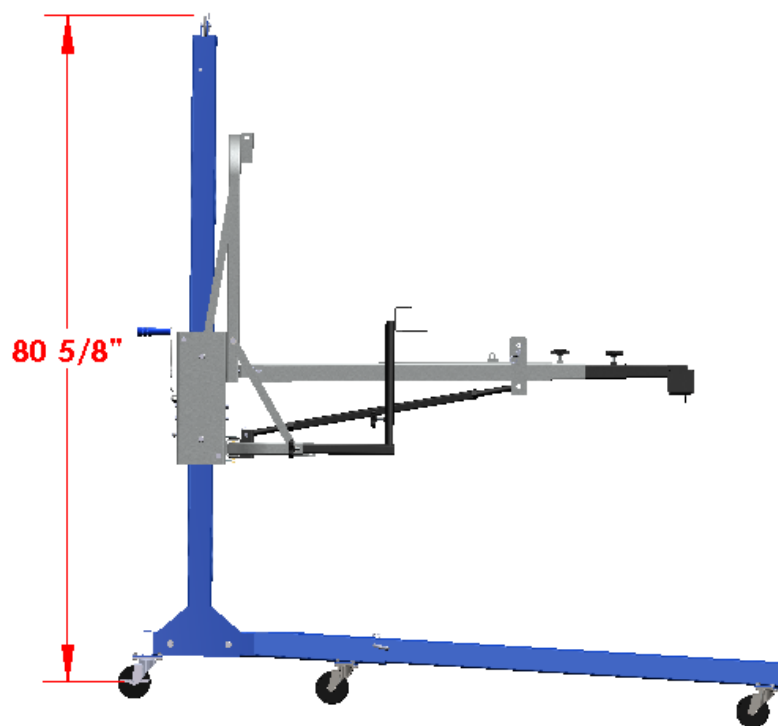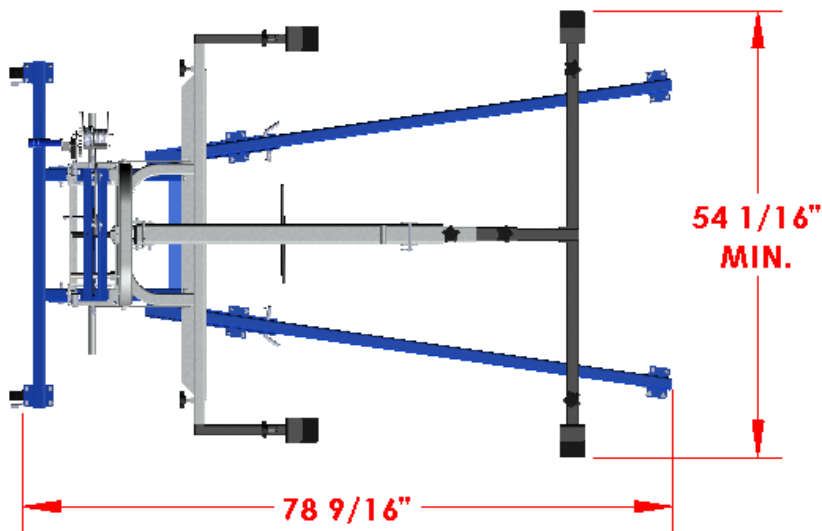

# Parts


PartNo	DESCRIPTION	QTY.
*	3" x 3" x .75" FLAT GRIPS-BLACK SLEEVE	4
LK-H006	3/8-16 STAR KNOB	2
LK4017	TURNBUCKLE BRACKET	1
LK4018	RIGHT REAR TOPPER MOUNT	1
LK4019	LEFT REAR TOPPER MOUNT	1
LK4020	REAR TOPPER ARM	2
LK4021	FRONT TOPPER ARM	2

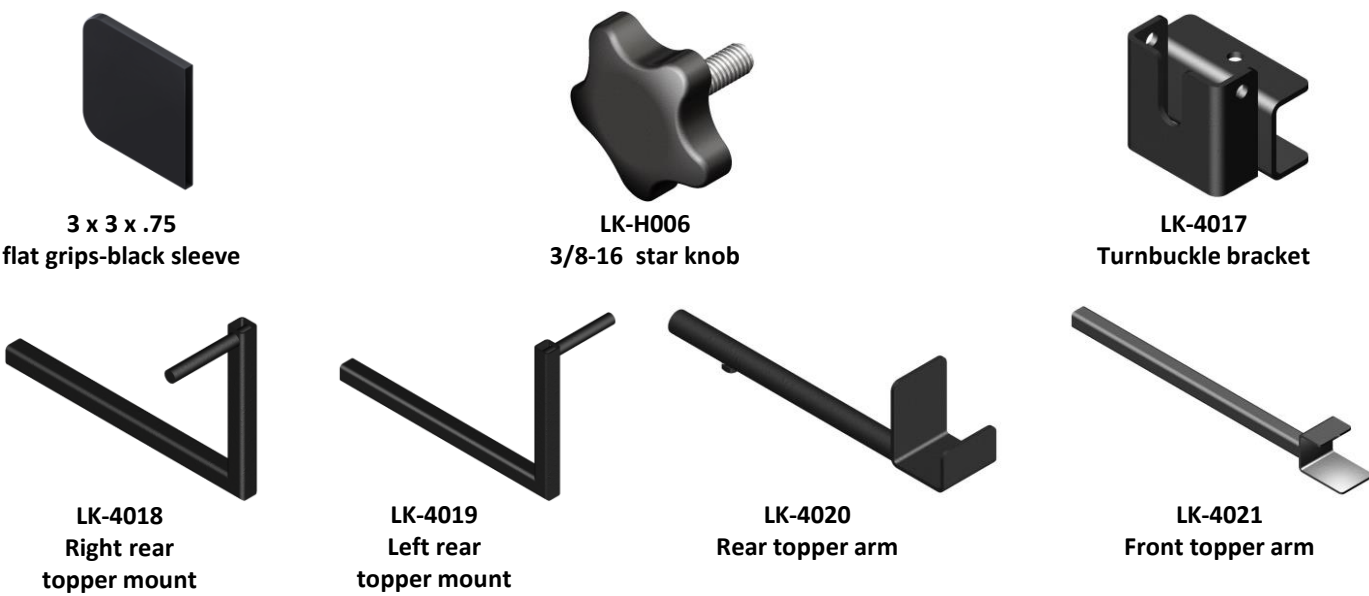

# Assembly

## STEP 1


Slide the 3 x 3 x .75 flat grips-black sleeves on to the LK4020 rear topper arms and the LK4021 front topper arms, as shown.

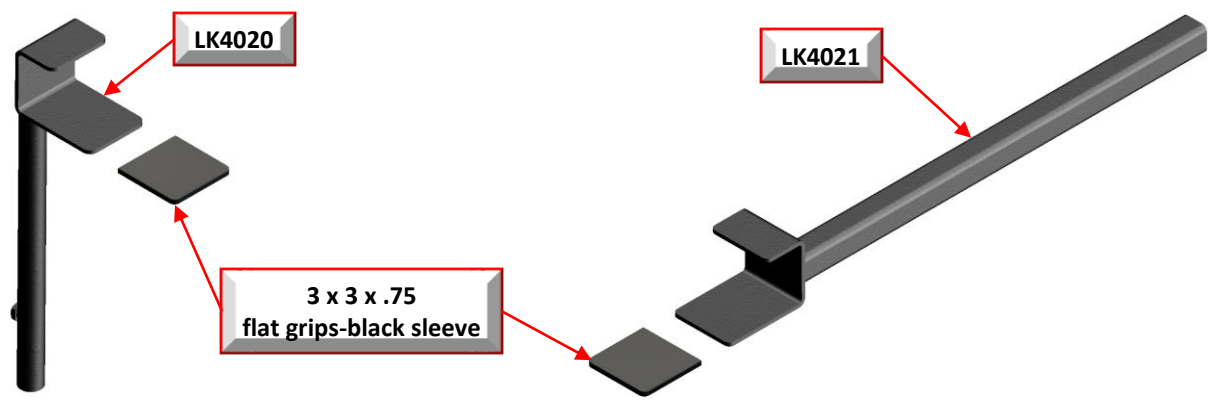

# Assembly


**STEP 2** *The following instructions are for a bottom mount installation. Use this installation method if there is not enough clearance between the Topper and the turnbuckle. If there is enough clearance, do not move the turnbuckle and go directly to Step 4. (see the Operation section of this manual for a picture of the Top Mount Installation)*

Use the 3/8" x 3" square bail locking pin provided with the LK4000 Main Component to attach the LK4017 turnbuckle bracket to the Main Component and "D" bar, as shown.

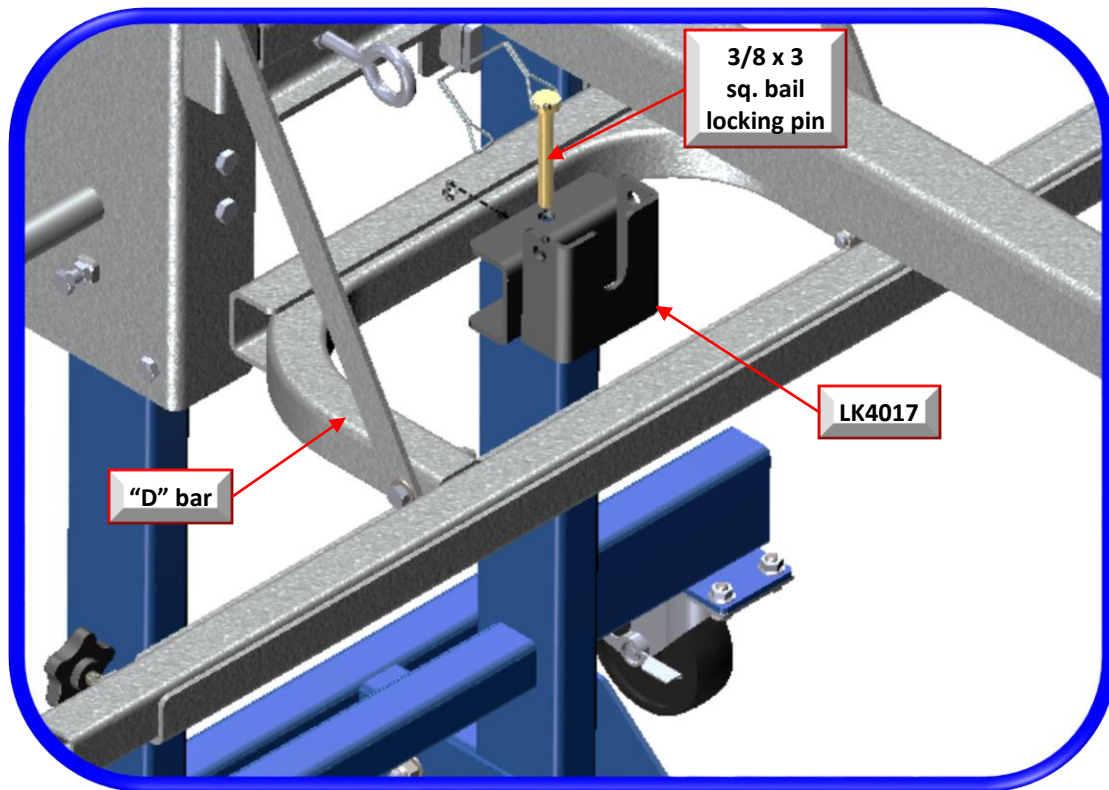

## STEP 3


Remove the turn buckle from the LK4000 Lift King and reattach it, using the same Bent-pull hitch pin and clevis pin, to the LK4017 turnbuckle bracket and the LK4000 Lift King's main boom.

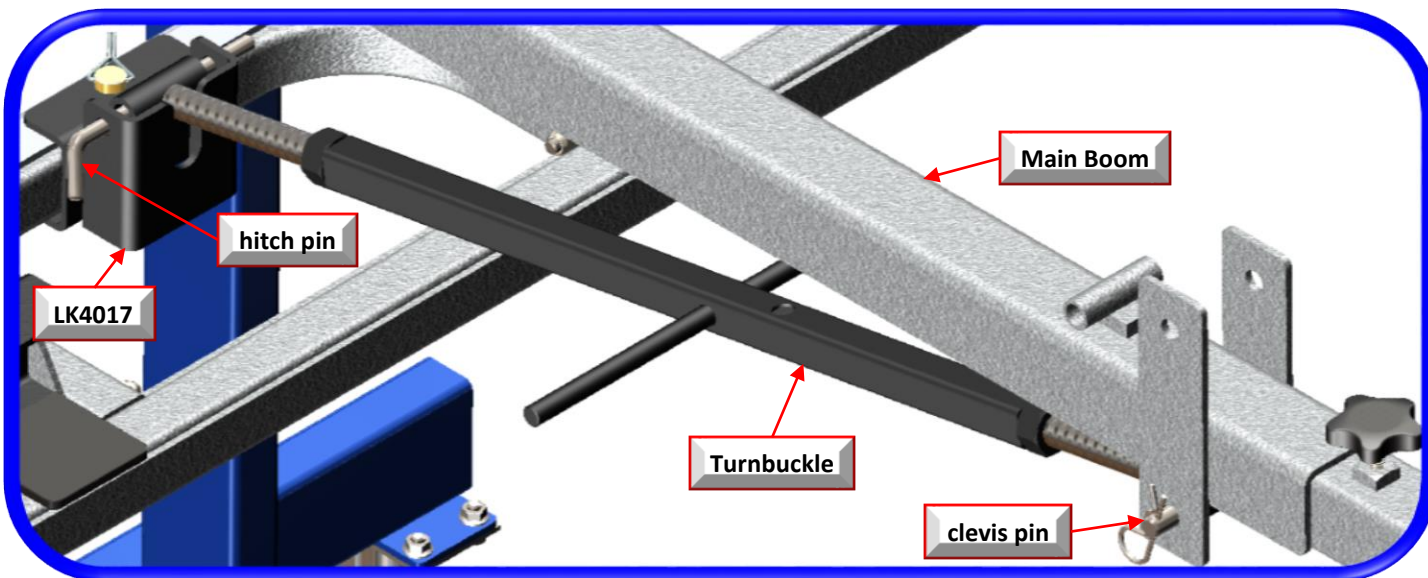

# Assembly


## STEP 4

Attach the LK4018 right rear topper mount and the LK4019 left rear topper mount to the "D" bar, as shown.

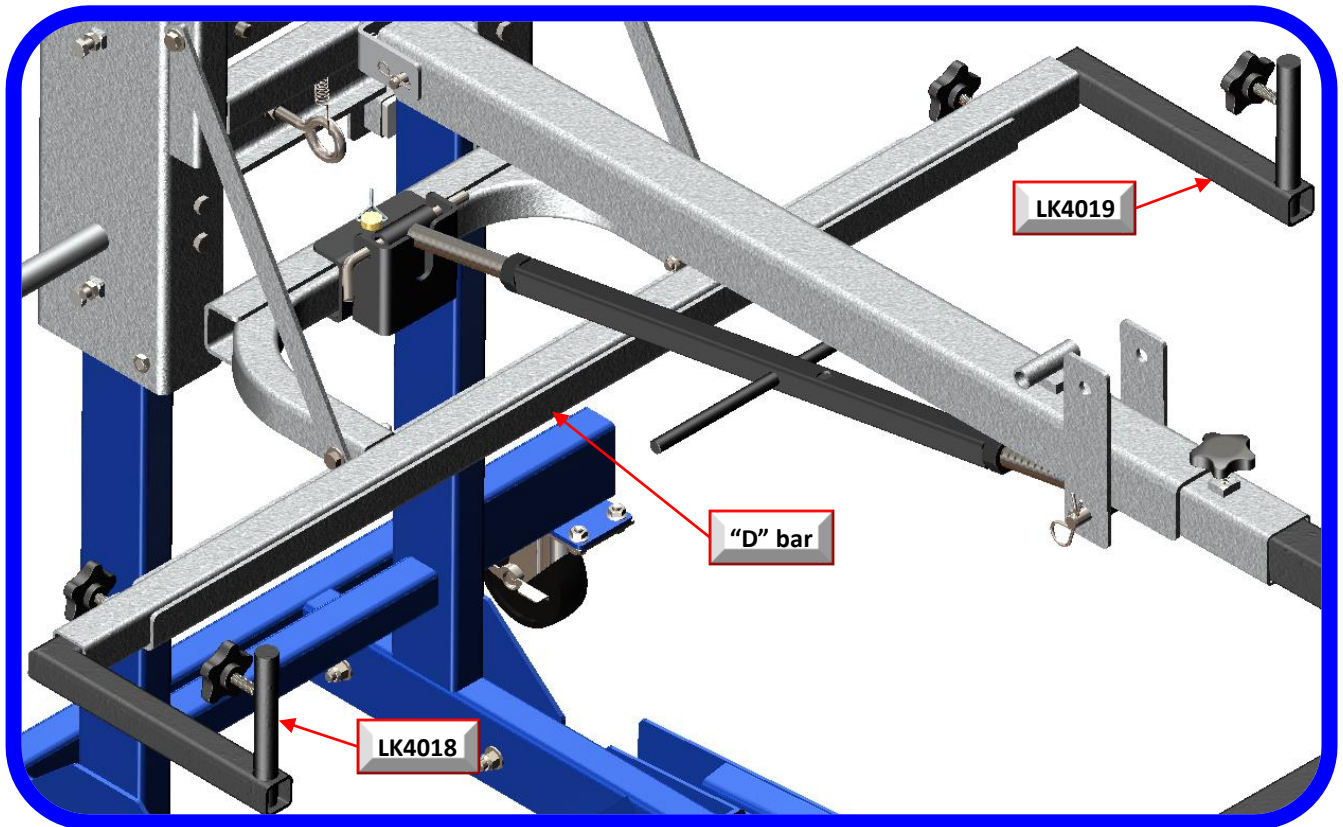

## STEP 5


Slide the LK4020 rear topper arms onto the LK4018 and LK4019. Thread the LK-H006 star knobs into the LK4020 rear toppers.

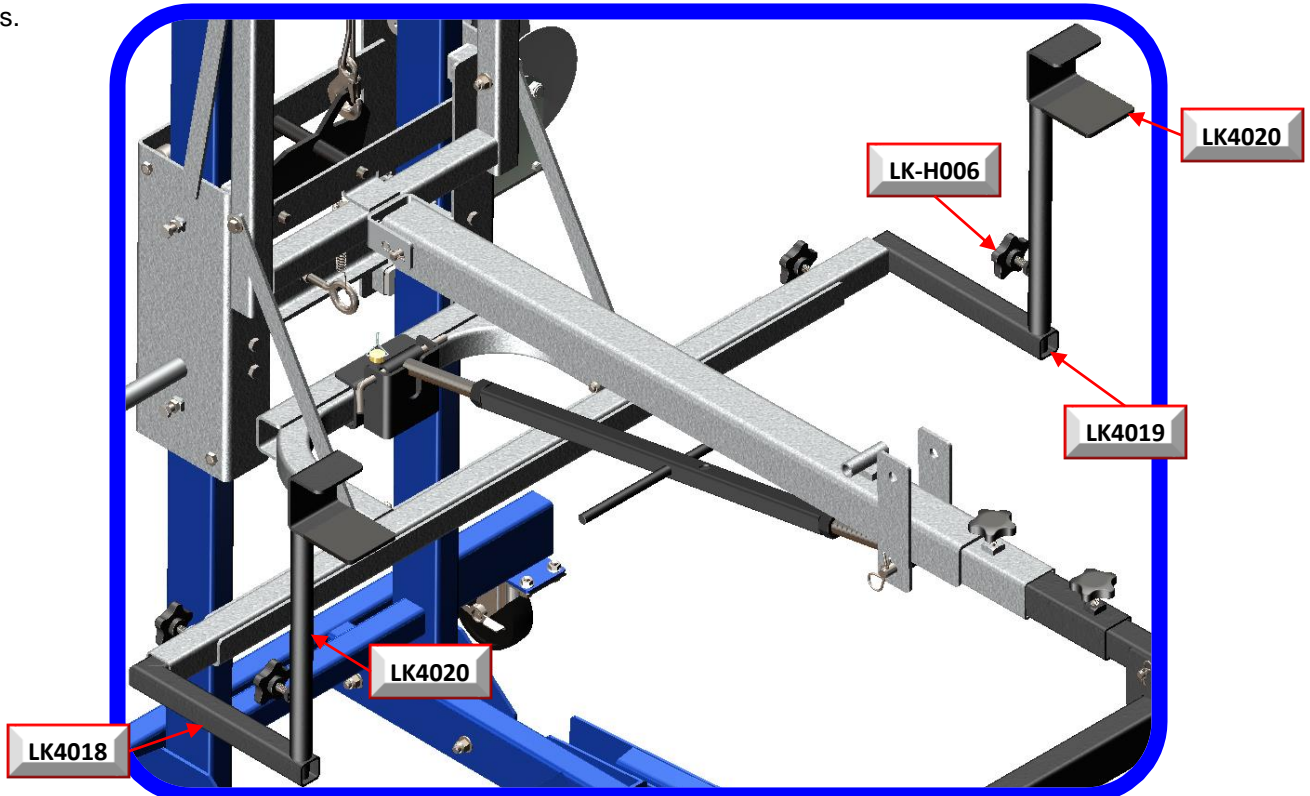

# Assembly

## STEP 6

Slide the LK4021 front topper arms into the tube of the "T" bar on the LK4000 Lift King (Main Component).

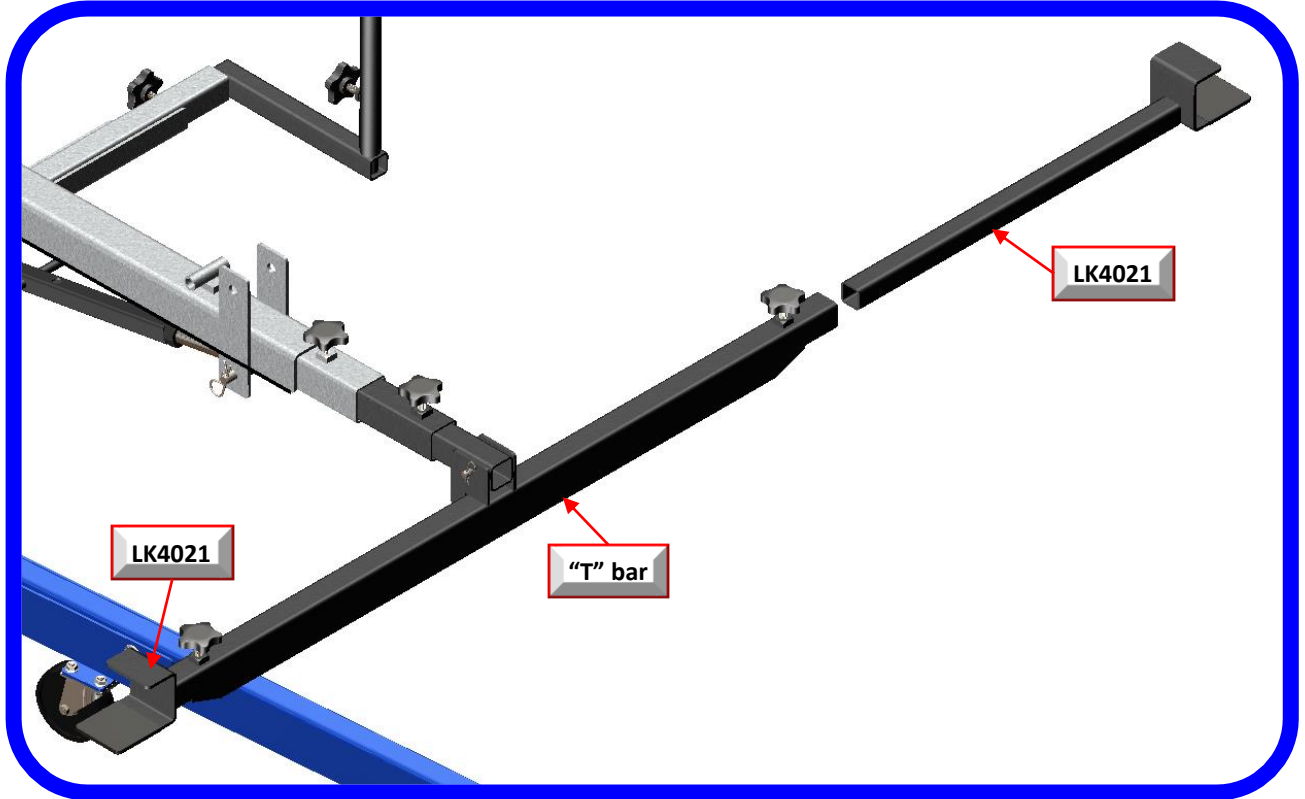

## Operation

Roll the LK4000 (Main Component) forward until the LK4054 Topper Attachment components are underneath the topper. Extend the Front (LK4021) and Rear (LK4020) Topper Arms until they are correctly positioned under the topper. Once the arms are correctly positioned, secure the arms in place by tightening the LK-H006 star knobs. The topper can now be lifted and removed.



**Topper Attachment shown in Top Mount position.**