


# ProLine

## TOOL & SUPPLY, LLC

### **LK4027**

### **STABILIZER BAR**

Assembly Guide

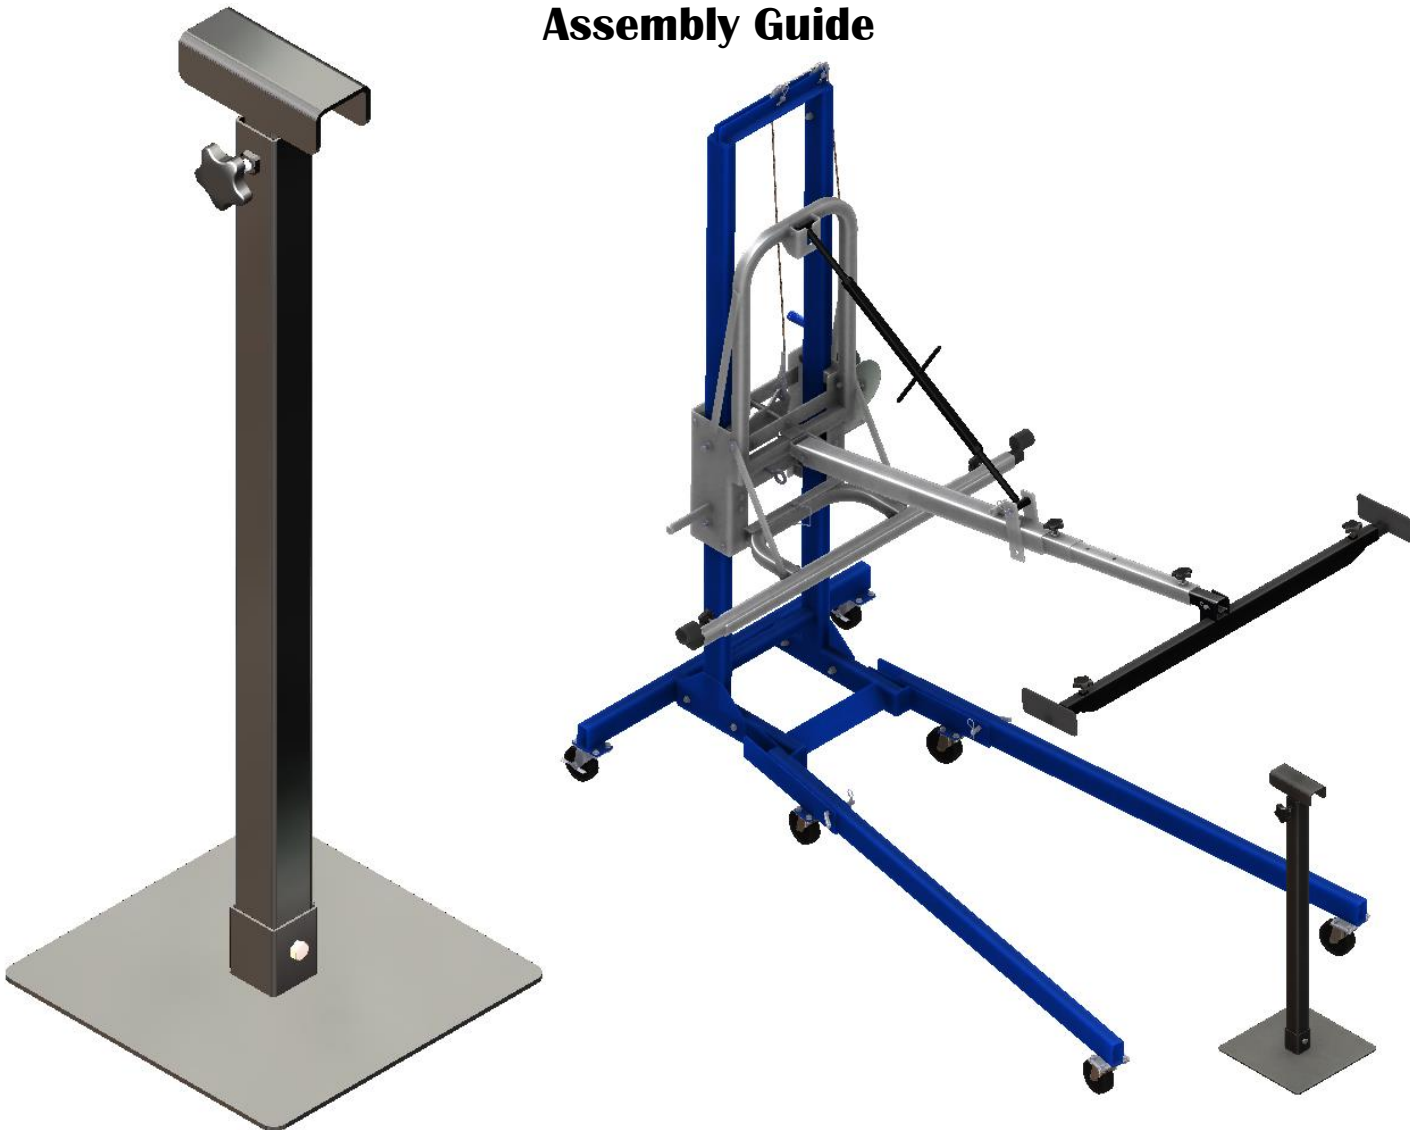

[www.prolinetoolsupply.com](http://www.prolinetoolsupply.com)

(989) 315-8946

# Table of Contents

STABILIZER BAR	3
SPECIFICATIONS	3
PARTS & HARDWARE	4
ASSEMBLY GUIDE	4
OPERATION	5


If you have any questions or comments, please call 1 (989) 315-8946.

**Proline Tool & Supply, LLC**  
**210 Pigeon Rd Bad Axe MI 48413 US**  
**(989) 315-8946**

# Stabilizer Bar

Collision work and other repairs are much easier when a pickup box is removed from the truck and kept on the LK4000 Lift King (Main Component). When changing out a box side or performing collision work, the LK4027 Stabilizer Bar is placed under the front of the box. The box is then lowered slightly onto the Stabilizer Bar. This stabilizes the box and reduces bounce, allowing the operator to more safely perform repairs. Most shops prefer to repair the pick-up box while it sits stable on the lift as opposed to using saw horses or blocks.

## Specifications

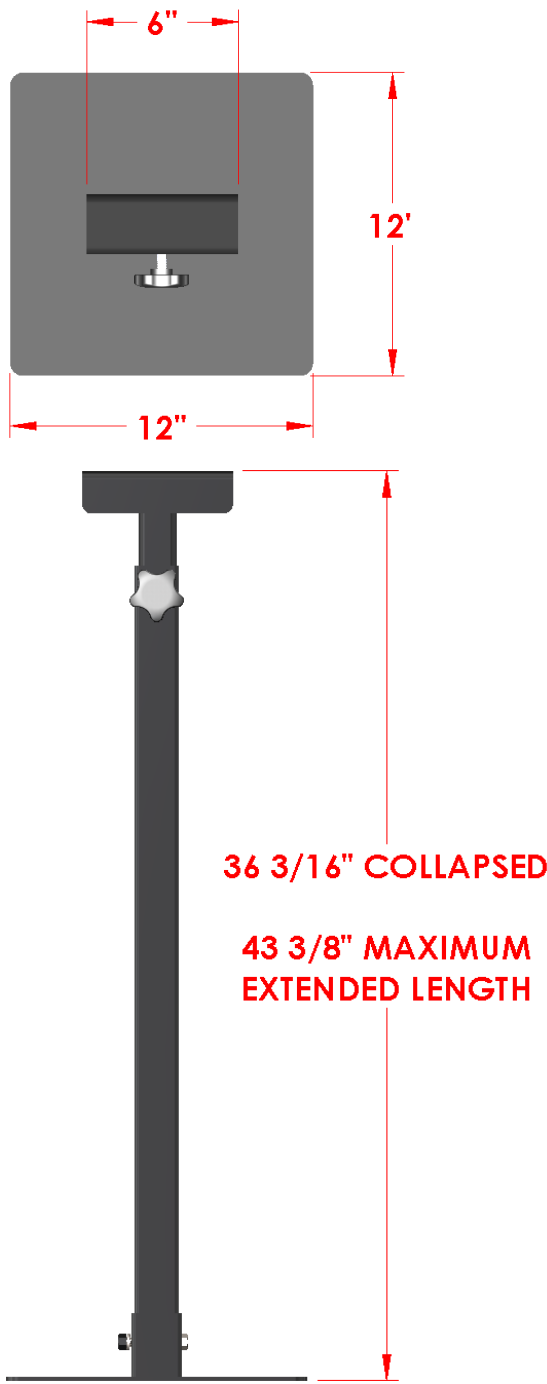

# Parts


PART NUMBER	DESCRIPTION	QTY.
LK4029	STABILIZER BASE	1
LK4030	STABILIZER INTERMEDIATE BAR	1
LK4031	STABILIZER TOP	1
LK-H006	STAR KNOB 3/8-16	1
LK-H014	HEX BOLT 3/8-16"x2-1/2"	1
LK-H015	LOCK WASHER 3/8"	1
HEX NUT	3/8-16 HEX NUT	1
	2"x 6" GREY NON-SKID TAPE	1



# Assembly

## STEP 1

Attach LK4029 to LK4030 as shown, using the 3/8-16 x 2 1/2 bolt, 3/8 split lock washer 3/8-16 hex nuts. **Securely tighten fasteners.**

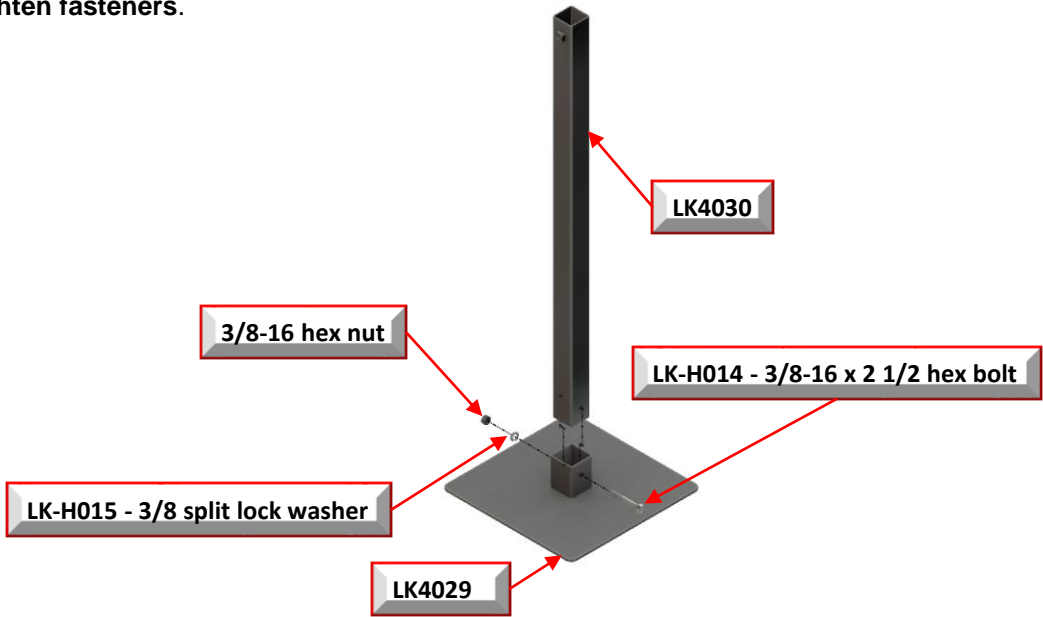


# Assembly

## STEP 2

Slide LK4031 into LK4030 and tighten the LK-H006 (3/8-16 star knob) securely. Apply 2 x 6 grey non-skid tape.



## Operation

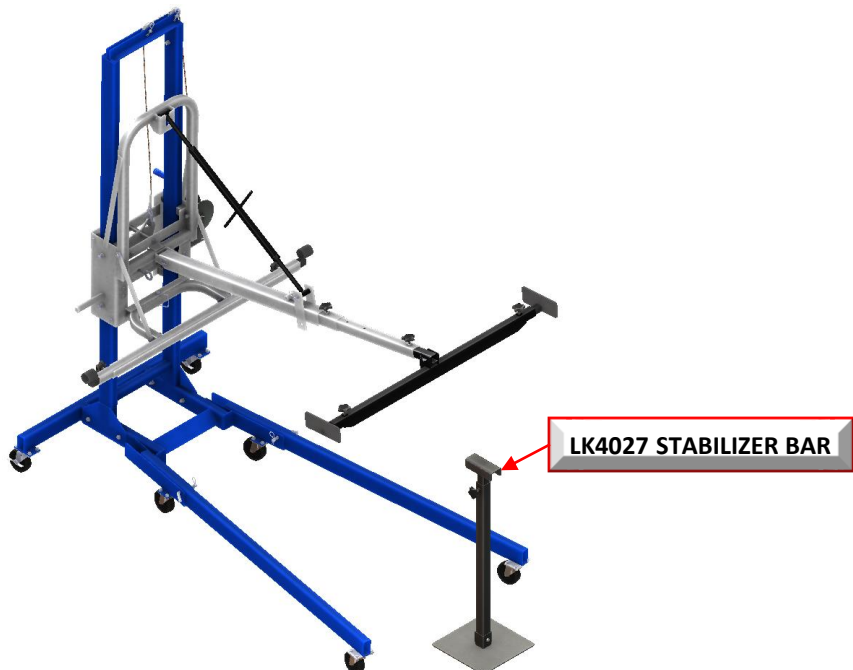

# Operation

